

Auditing Test Report

Test Report No.:SA13-4043/23

Date: 26/01/2023

Client

Saudi Vitrified Clay Pipe Co.

P.O. Box 6415

Riyadh 11442

Kingdom of Saudi Arabia

Sampling Date: 22/01/2023

Test Date: 23/01/2023

Auditing Purpose:

Testing of Vitrified Clay Pipes jointed by system C according to EN 295-1:2013

Size Description:

Nominal Size: DN 200 SS * 1750 mm

Jointing System: System C

Class: 200

Description of Sampling

Samples were collected randomly from the stock at the client's manufacturing works in Riyadh (Kingdom of Saudi Arabia) by the agent of the Suhaimi - Fugro


Underlying specification /description of the tests

EN 295-1:2013 "Vitrified clay pipe systems for drains and sewers - Part 1: Requirements for pipes, fittings & joints"

GSO EN 295-1:2008 "Vitrified clay pipe systems for drains and sewers - Part 1: Requirements for pipes, fittings & joints"

EN 295-2:2013 "Vitrified clay pipe systems for drains and sewers - Part 2: Evaluation of conformity and sampling"

EN 295-3:2012 "Vitrified clay pipe systems for drains and sewers - Part 3: Test Methods"

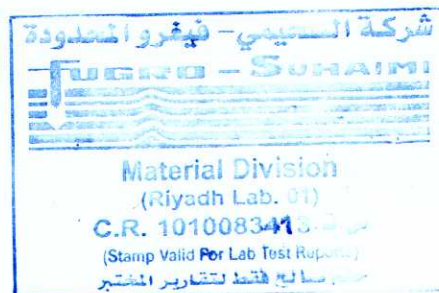

Test Results of DN 200 SS 1.75m

Test Report No.:SA13-4043/23

Test Type		Unit	Sample 1	Sample 2	Sample 3	Req.	Result	
Pipes	Marking (visual Inspection)	-	✓	✓	✓	✓	✓	
	Crushing Strength	KN/m	66	67	66	≥ 45	✓	
	Internal Barrel Diameter "D1"	mm	201	201	202	≥ 195	✓	
	Length	mm	1760	1760	1750	1750 ^{+4%} _{-1%}	✓	
	Water Tightness	L/m ²	0.03	0.01	0.02	≤ 0.04	✓	
	Deviation from Straightness	mm	2.1	2.6	2.4	< 4.0	✓	
	Squareness of Ends	Socket	mm	2.4	2.4	2.8	< 6.0	✓
		Spigot	mm	1.9	1.6	1.4		
	Airtightness	mm	5	0	10	Drops ≤ 25	✓	
	Chemical Resistance	%	0.15	0.15	0.17	0.10-0.25%	✓	
	Water Absorption	%	2.9	2.5	2.7	≤ 6 %	✓	
	Bending Moment Resistance	KNm	18.1	17.6	16.6	≥ 8.6	✓	
Joint Assembly	Joint Interchangeability (D4)	mm	260.3	260.3	260.4	260 ± 0.5	✓	
	Watertightness under Angular Deflection	0.5 bar	No leak, Deflection applied is 80 mm/m for 5 min.			No visible leakage	✓	
	Watertightness under Shear	0.5 bar	No leak, Shear force applied is 5.0 KN for 15 min.			No visible leakage	✓	
	Continuity of Invert	mm	2.1	2.5	2.3	≤ 4	✓	

xeedham

FUGRO - SUHAIMI LTD

Inam Syed

